


TECHNICAL CHARACTERISTICS

FERMENTER: ENOLOGICAL TANKS WITH BUCKLED PLATES COOLING JACKET

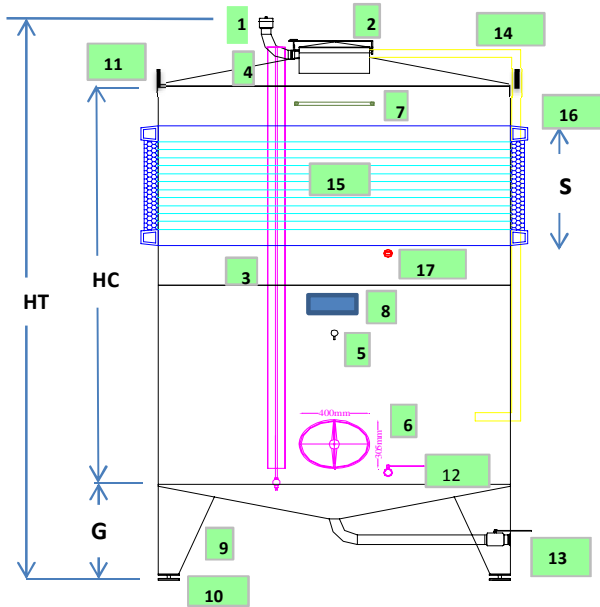

Legend accessories		Standard/ Optional
1	Air Valve with double effect PVC	Standard
2	Central top manhole Φ 400mm	Standard
3	Supporting Legs AISI 304	Standard
4	Level indicator outlet	Optional
5	Stainless steel Sample - Tap 3/8"	Standard
6	Manhole Elliptic/Rounde/ Rectangular	Optional
7	Ladder Support in Stainless Steel from 20HI	Standard
8	Manufacturer plate from 20HI	Standard
9	Supporting Legs AISI 304	Standard
10	Screw adjust System for legs. From Φ 1200mm	Standard
11	Ladder support in Stainles Steel from 20HI	Standard
12	Ball valve for partial draining AISI 304	Optional
13	Ball valve for Total draining AISI 304	Optional
14	Pumping over pipe with Rotating system, to sprinkle w	Optional
15	Buckled plates cooling jacket	Standard
16	Isulation of cooling system	Optional
17	Termometer	Optional

(*) Butterfly Finishing BA with thk less than 1,2mm, 2B with thk up than 1,2mm

Capacity		Diameter Tank (mm)	HEIGHT					THICKNESS (*)			Drain Parial /Total		Cooling Jacket S (mm)
Nom. hl	Real hl		Bottom (mm)	Cylinder (mm)	Top (mm)	Legs (mm)	Total H (mm)	Bottom (mm)	Cylinder (mm)	Top (mm)	Partial Gas	Total Gas	
10	10,5	1020	100	1250	100	300	1850	1,2	1,0	1,0	1"	1"1/4	550
15	15,5	1020	100	1870	100	300	1500	1,2	1,2 - 1,0	1,0	1"	1"1/4	550
20	20,5	1020	100	2500	100	300	3100	1,2	1,2 - 1,0	1,0	1"1/4	1"1/4	550
20	20,9	1200	120	2000	120	600	2900	1,5	1,2	1,2	1"1/4	1"1/4	550
30	31,5	1400	140	2000	140	600	2900	1,5	1,5 - 1,2	1,2	1"1/4	1"1/4	550
50	52,5	1600	170	2500	170	600	3500	1,5	1,5 - 1,2	1,5	1"1/4	1"1/2	550
77	77,7	1600	170	3750	170	600	4700	1,5	1,5 - 1,2	1,5	1"1/4	1"1/2	550
80	82,9	2000	210	2500	210	600	3500	2,0	1,5	1,5	2"	2"	970
100	114,3	2000	210	3500	210	600	4500	2,0	1,5	1,5	2"	2"	970
150	152,9	2390	250	3500	250	600	4550	2,5	1,5	1,5	2"	2"	970
200	217,4	2500	260	4250	260	600	5300	2,5	2,0 - 1,5	1,5	2"	2"	970
300	315,2	2500	260	6250	260	600	7300	3,0	2,0 - 1,5	1,5	2"	2"	970