


# TECHNICAL CHARACTERISTICS

## STORAGE TANK WITH FLOATING TOP

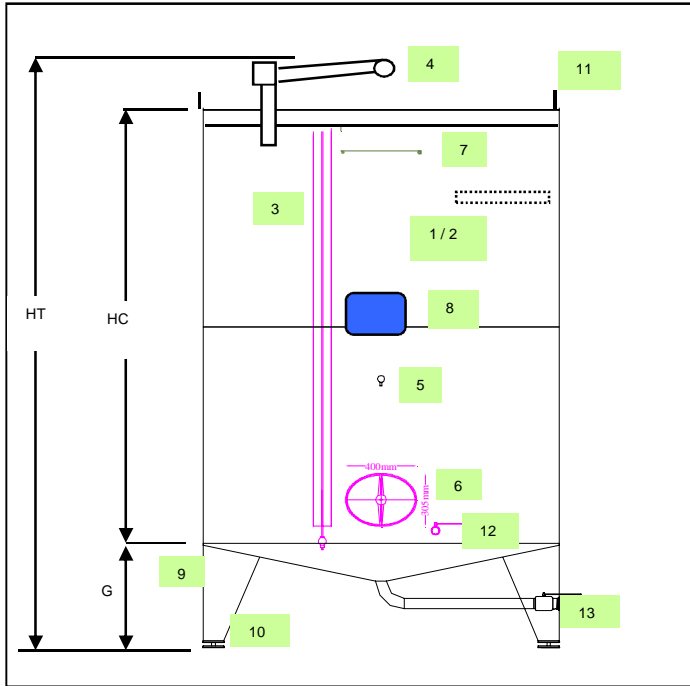

Legend accessories		Standard
1	Pneumatic Floater	Standard
2	Oil - Float (Until 1000 l. )	Optional
3	Supporting Legs AISI 304	Standard
4	Lifting - arm ( Craine)	Optional
5	Stainless steel Sample - Tap 3/8"	Standard
6	Manhole Elliptic/Rounde/ Rectangular	Optional
7	Ladder Support in Stainless Steel from 20HI	Standard
8	Manufacturer plate from 20HI	Standard
9	Supporting Legs AISI 304	Standard
10	Screw adjust System for legs. From $\Phi 1200\text{mm}$	Standard
11	Ladder support in Stainles Steel from 20HI	Standard
12	Ball valve for partial draining AISI 304	Optional
13	Ball valve for Total draining AISI 304	Optional

(\*) Butterfly Finishing BA with thk less than 1,2mm, 2B with thk up than 1,2mm

Capacity		Diameter Tank (mm)	HEIGHT				THICKNESS (*)		Drain Parial /Total	
Nom. hl	Real hl		Bottom (mm)	Cylinder (mm)	Top (mm)	Total H (mm)	Bottom (mm)	Cylinder (mm)	Partial Gas	Total Gas
3	3,1	640	60	1000	300	1400	1,2	1,0	1"	1"1/4
5	5,2	750	80	1250	300	1700	1,2	1,0	1"	1"1/4
8	8,3	890	90	1250	300	1700	1,2	1,0	1"	1"1/4
10	10,5	1020	100	1250	300	1750	1,2	1,0	1"	1"1/4
15	15,5	1020	100	1870	300	2300	1,2	1,2 - 1,0	1"	1"1/4
20	20,5	1020	100	2500	300	3000	1,2	1,2 - 1,0	1"1/4	1"1/4
20	20,9	1200	120	2000	600	2800	1,5	1,2	1"1/4	1"1/4
30	31,5	1400	140	2000	600	2850	1,5	1,5 - 1,2	1"1/4	1"1/4
50	52,5	1600	170	2500	600	3200	1,5	1,5 - 1,2	1"1/4	1"1/2
77	77,7	1600	170	3750	600	4400	1,5	1,5 - 1,2	1"1/4	1"1/2
80	82,9	2000	210	2500	600	3400	2,0	1,5	2"	2"
100	114,3	2000	210	3500	600	4300	2,0	1,5	2"	2"
150	152,9	2390	250	3500	600	4500	2,5	1,5	2"	2"