


TECHNICAL CHARACTERISTICS

ENOLOGICAL STORAGE TANKS STANDING ON LEGS

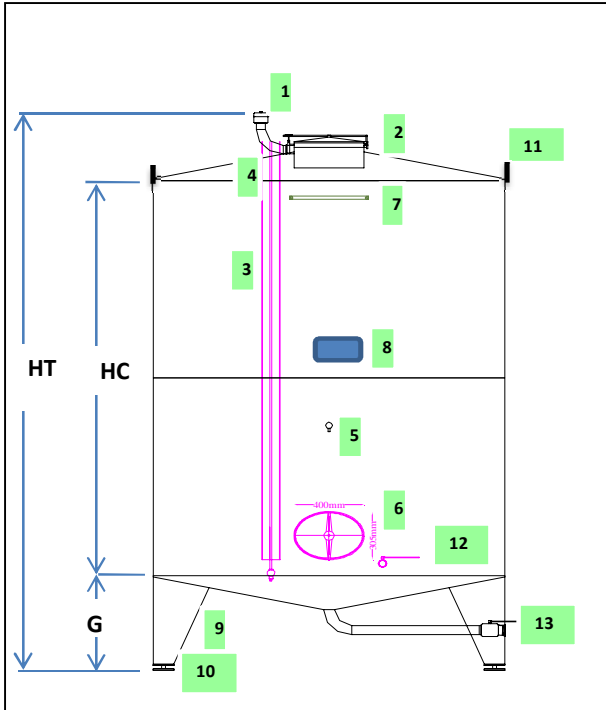

Legend accessories		Standard/ Optional
1	Air Valve with double effect PVC	Standard
2	Central top manhole Φ 400mm	Standard
3	Supporting Legs AISI 304	Standard
4	Level indicator outlet	Optional
5	Stainless steel Sample - Tap 3/8"	Standard
6	Manhole Elliptic/Rounde/ Rectangular	Optional
7	Ladder Support in Stainless Steel from 20HI	Standard
8	Manufacturer plate from 20HI	Standard
9	Supporting Legs AISI 304	Standard
10	Screw adjust System for legs. From Φ 1200mm	Standard
11	Ladder support in Stainles Steel from 20HI	Standard
12	Ball valve for partial draining AISI 304	Optional
13	Ball valve for Total draining AISI 304	Optional

(*) Butterfly Finishing BA with thk less than 1,2mm, 2B with thk up than 1,2mm

Capacity		Diameter Tank (mm)	HEIGHT					THICKNESS (*)			Drain Parial /Total		Total Weight (Kg)
Nom. hl	Real. hl		Bottom (mm)	Cylinder (mm)	Top (mm)	Legs (mm)	Total H (mm)	Bottom (mm)	Cylinder (mm)	Top (mm)	Partial Gas	Total Gas	
3	3,1	640	60	1000	60	300	1600	1,2	1,0	1,0	1"	1"1/4	47
5	5,2	750	80	1250	80	300	1800	1,2	1,0	1,0	1"	1"1/4	58
8	8,3	890	90	1250	90	300	1800	1,2	1,0	1,0	1"	1"1/4	65
10	10,5	1020	100	1250	100	300	1850	1,2	1,0	1,0	1"	1"1/4	80
15	15,5	1020	100	1870	100	300	1500	1,2	1,2 - 1,0	1,0	1"	1"1/4	90
20	20,5	1020	100	2500	100	300	3100	1,2	1,2 - 1,0	1,0	1"1/4	1"1/4	110
20	20,9	1200	120	2000	120	600	2900	1,5	1,2	1,2	1"1/4	1"1/4	145
30	31,5	1400	140	2000	140	600	2900	1,5	1,5 - 1,2	1,2	1"1/4	1"1/4	180
50	52,5	1600	170	2500	170	600	3500	1,5	1,5 - 1,2	1,5	1"1/4	1"1/2	260
77	77,7	1600	170	3750	170	600	4700	1,5	1,5 - 1,2	1,5	1"1/4	1"1/2	320
80	82,9	2000	210	2500	210	600	3500	2,0	1,5	1,5	2"	2"	380
100	114,3	2000	210	3500	210	600	4500	2,0	1,5	1,5	2"	2"	420
150	152,9	2390	250	3500	250	600	4550	2,5	1,5	1,5	2"	2"	630
200	217,4	2500	260	4250	260	600	5300	3,0	2,0 - 1,5	1,5	2"	2"	850
300	315,2	2500	260	6250	260	600	7300	3,0	2,0 - 1,5	1,5	2"	2"	950