


TECHNICAL CHARACTERISTICS

ENOLOGICAL STORAGE TANKS STANDING ON LEGS

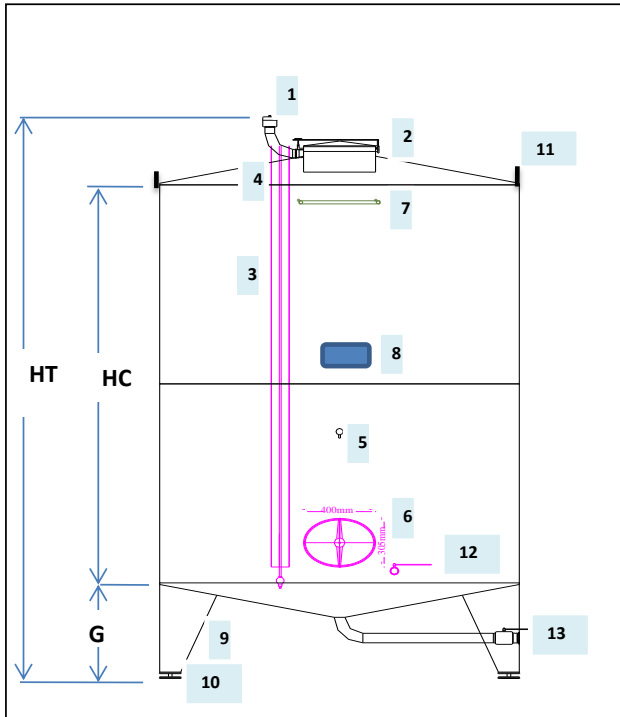

Legend accessories		Standard/ Optional
1	Air Valve with double effect PVC	Standard
2	Central top manhole Φ 400mm	Standard
3	Supporting Legs AISI 304	Standard
4	Level indicator outlet	Optional
5	Stainless steel Sample - Tap 3/8"	Standard
6	Manhole Elliptic/Rounde/ Rectangular	Optional
7	Ladder Support in Stainless Steel from 20HI	Standard
8	Manufacturer plate from 20HI	Standard
9	Supporting Legs AISI 304	Standard
10	Screw adjust System for legs. From Φ 1200mm	Standard
11	Ladder support in Stainles Steel from 20HI	Standard
12	Ball valve for partial draining AISI 304	Optional
13	Ball valve for Total draining AISI 304	Optional

(*) Butterfly Finishing BA with thk less than 1,2mm, 2B with thk up than 1,2mm

Capacity		Diameter Tank (mm)	HEIGHT					THICKNESS (*)			Drain Parial /Total		Total Weight (Kg)
Nom. hl	Real. hl		Bottom (mm)	Cylinder (mm)	Top (mm)	Legs (mm)	Total H (mm)	Bottom (mm)	Cylinder (mm)	Top (mm)	Partial Gas	Total Gas	
3	3,1	640	60	1000	60	300	1600	1,2	1,0	1,0	1"	1"1/4	47
5	5,2	750	80	1250	80	400	1900	1,2	1,0	1,0	1"	1"1/4	58
8	8,3	890	90	1250	90	400	1900	1,2	1,0	1,0	1"	1"1/4	65
10	10,5	1020	100	1250	100	400	1950	1,2	1,0	1,0	1"	1"1/4	80
15	15,5	1020	100	1870	100	400	2500	1,2	1,2 - 1,0	1,0	1"	1"1/4	90
20	20,5	1020	100	2500	100	400	3100	1,2	1,2 - 1,0	1,0	1"1/4	1"1/4	110
20	20,9	1200	120	2000	120	600	2900	1,5	1,2	1,2	1"1/4	1"1/4	145
30	31,5	1400	140	2000	140	600	2900	1,5	1,5 - 1,2	1,2	1"1/4	1"1/4	180
50	52,5	1600	170	2500	170	600	3300	1,5	1,5 - 1,2	1,5	1"1/4	1"1/2	260
77	77,7	1600	170	3750	170	600	4700	1,5	1,5 - 1,2	1,5	1"1/4	1"1/2	320
80	82,9	2000	210	2500	210	600	3500	2,0	2,0 - 1,5	1,5	2"	2"	380
100	114,3	2000	210	3500	210	600	4500	2,0	2,0 - 1,5	1,5	2"	2"	420
150	152,9	2390	250	3500	250	600	4550	2,5	2,0 - 1,5	1,5	2"	2"	630
200	217,4	2500	260	4250	260	600	5300	3,0	2,0 - 1,5	1,5	2"	2"	850
300	315,2	2500	260	6250	260	600	7300	3,0	2,0 - 1,5	1,5	2"	2"	950